Generated: 26 April, 2024, 17:04

2014 Rule	Change	Decisions
Posted by Sterling	Doc - 12 Nov	2013 18:15

We had a good debate this year with lots of suggestions. The series directors deliberated over these offline, and some good solutions and compromises were hashed out The decisions, and a brief explanations follow below.

1. Balance shaft (belt) delete

Denied

There is too much uncertainty about the adverse consequences, even among major engine builders.

The vote was about even, and offered no compelling reason for a rules change given the potential risks involved.

2. Oil Pan Gasket retainer

Approved

This had fairly overwhelming support in the vote count, and seems low risk for unintended consequences.

3. Expand legal ballast mounting area

Denied

No compelling reason for a rules change, and vote was negative.

Current location is one of the stronger/safer places to mount ballast in a 944.

Generated: 26 April, 2024, 17:04

Competitors are reminded that attempts to end run around the ballast rule are subject to penalties. Anything that is heavy, and unnecessary, or unreasonably heavy for it's intended function may be deemed ballast at the discretion of a NASA official, and subject to ballast restrictions on mounting and location. If anyone has questions on this, they are encouraged to contact their series director, or me on what they have in mind, or with any concerns.

4. Allow 205/50/15 RR Toyo RR tires
Denied
Vote went against. Potentially messy.
5a. Remove rule 12.5 Heads and allowable shaving
Denied
Popular vote was close.
After some discussion among the series directors, it was decided that dyno and whistler availability is not sufficient to eliminate this rule at this time.
5b. Remove rule 13.5 computer management system
Denied
Vote was unanimous against this proposal
6. Remove 18 - Special Transition allowance
Denied

Generated: 26 April, 2024, 17:04

Vote was to keep this rule, and series directors thought it was useful enough to keep.

7. Allow offset Woodruf key

Approved, but limited to 2 degree offset key, and low compression piston engines only

This proposal had the most debate by the series directors. While it is widely agreed that there should be some allowance to improve the situation of the low compression piston cars, there was significant concern over the expense of dyno testing to dial this in for a given car and head shave. There is also little hard data to guide racers. Online sources indicate that somewhere around 3 degrees is needed to correct a significantly shaved head, and less for lesser shaves. Commonly available offset keys come in 2 and 4 degree offsets. It was thought that offering a single, conservative option would greatly simplify the process, and lessen the expense involved in implementing this new rule, while still offering some benefit to the low compression cars. It should also be low risk. So the compromise is one take-it-or-leave-it option: OEM, or an offset Woodruff key with 2 degrees of advance.

8.	Outlaw	'88	com	puter
----	--------	-----	-----	-------

Denied

Vote was negative, and it was thought there was not a compelling reason to force change on a large installed base of cars.

9a. Allow blocks to be honed 20 thousandths oversize, and bores redone by factory process


9b. Allow exact reproduction '88 piston, 20 thousands oversize

Denied

The vote was surprisingly close, and the day for this rule change is coming, but not yet. As of now, the availability of motors has not reached the pain threshold for a major rules change.

10. Transmission Cooler

Approved
The vote was close here as well.
We now have data showing high temps, especially with sustained running in hot ambient temps. While the effect of these temps on failure rates is not clear, expert opinion on the observed 270 degree oil temps is unfavorable with regard to transmission life. LSD transmissions, in particular, are getting more scarce and expensive. As this is an entirely optional modification, with no significant performance potential, it was passed.
We will not allow Turbo cases/oil pump gears, only external pumps and coolers.
11. Allow crankcase breather to vent to a catch can
Approved
Vote was highly positive. Little downside, and removed any gray area for cars so equipped.
12a. Limit ram air ducting to bumper turn signal hole - or-
12b. No ducting to air filter element outside of OEM configuration. May use open element air filter within the engine compartment
Denied
Both went down by popular vote by a substantial margin.
13. Allow use of Lexan for rear side windows.

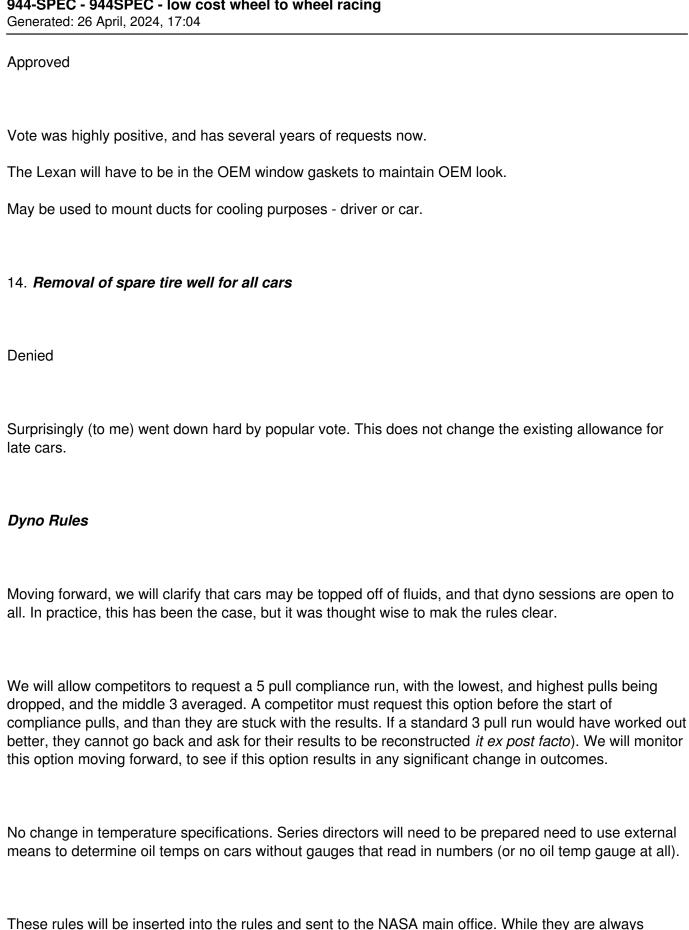

subject to revision and approval by NASA, the expectation (and practice for many years) is that they are

adopted as recommended.

Generated: 26 April, 2024, 17:04 I hope this helps all with their offseason plans for the 2014 season! Re: 2014 Rule Change Decisions
Posted by Big Dog - 17 Dec 2013 09:55 I have a new turbo radiator in my car and it could not handle the oil cooler in front of it. Remember, we run in 100+ temps out here. The factory setup worked just fine on STREET CARS, not cars that are now race cars. In addition, Germany does not see our kinds of temps either. Many Porsche's had trouble, in the past, with our American West temps. Porsche had to change their design specs as they sold more and more cars here. Eric, thanks for going back to NASA on this one. It simply would not work for us " Hot Air" guys otherwise. And for everyone, it is important to be open minded about rule proposals. Different regions have different issues/weather, etc. Some rules may not matter to most but are important to some. If they are not performance issues, try to be open to them even it they are not significant for your own personal car. Jim